


FLAIL MOWER - EASY

SK 1300, 1500, 1700 MM/MH

As the name implies, this mower will make your life easier. It can be operated hydraulically or mechanically and mounted at the front or the rear. With the hydraulic side shift, you can easily move the mower left and right without leaving the cab. (optional) The hydraulic rear roller rides on the ground and adjusts the cutting height as you go. Thanks to the rubber skirt, front flaps, or chain guard, you won't have to worry about projecting gravel everywhere. Also included are anti-scalping skid pans, a bottom blade to ensure even mulching. Supporting legs for hassle-free storage.

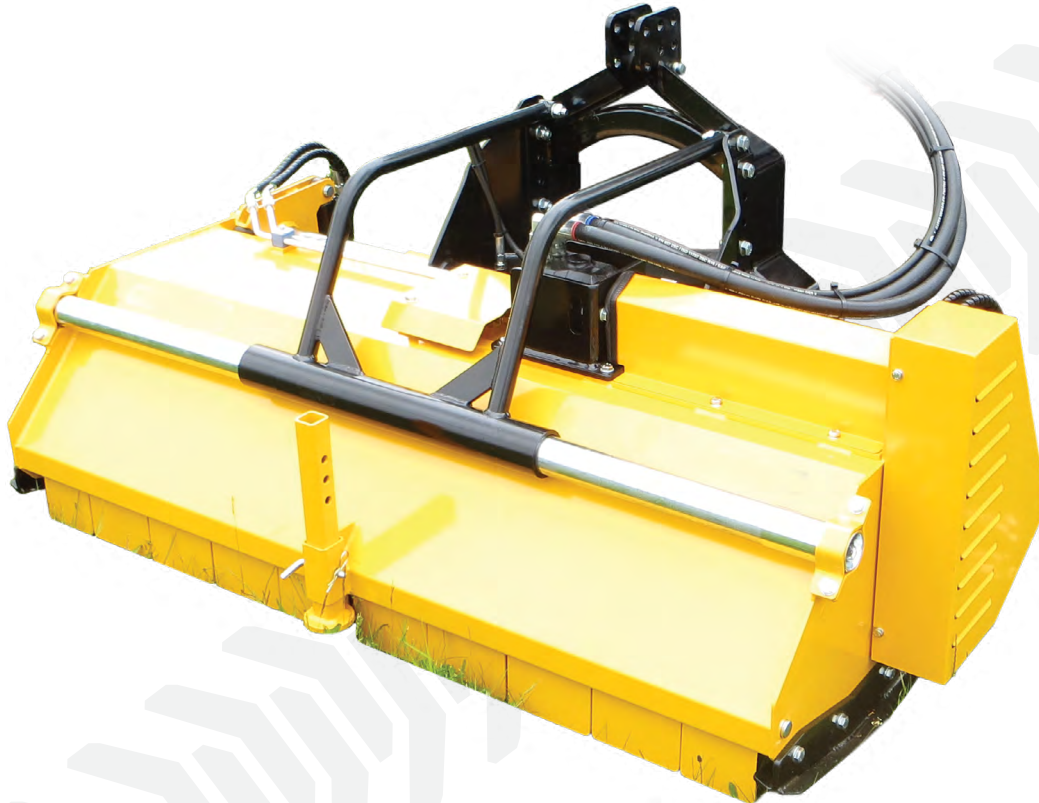

BUILT TO LAST

METAL TECHNOLOGY INC.

METEC

	SK 1300 MM/MH	SK 1500 MM/MH	SK 1700 MM/MH
Weight	739 lbs (335 kg)	827 lbs (375 kg)	915 lbs (415 kg)
Cutting Width	51" (130 cm)	59" (150 cm)	67" (170 cm)
Overall Width	62" (158 cm)	70" (178 cm)	78" (198 cm)
Overall Height	35" (88 cm)		
Cutting Height	1-3" (3-8 cm)		
Power Requirements	16 HP (12 kW)	19 HP (14 kW)	21 HP (15 kW)
Number of Y Flails	84 sets	96 sets	112 sets
Number of J Flails	42 sets	48 sets	56 sets
Standard Features	Heavy-duty rotary axle, supporting leg for storage, front flaps or chain guard		
Hitch Category	3 Point Hitch		
Options	Hydraulic side shift, Rear roller with hydraulic height adjustment		